


MV D340 Door Locks

Split Spindle

2 Hooks & 2 Cams

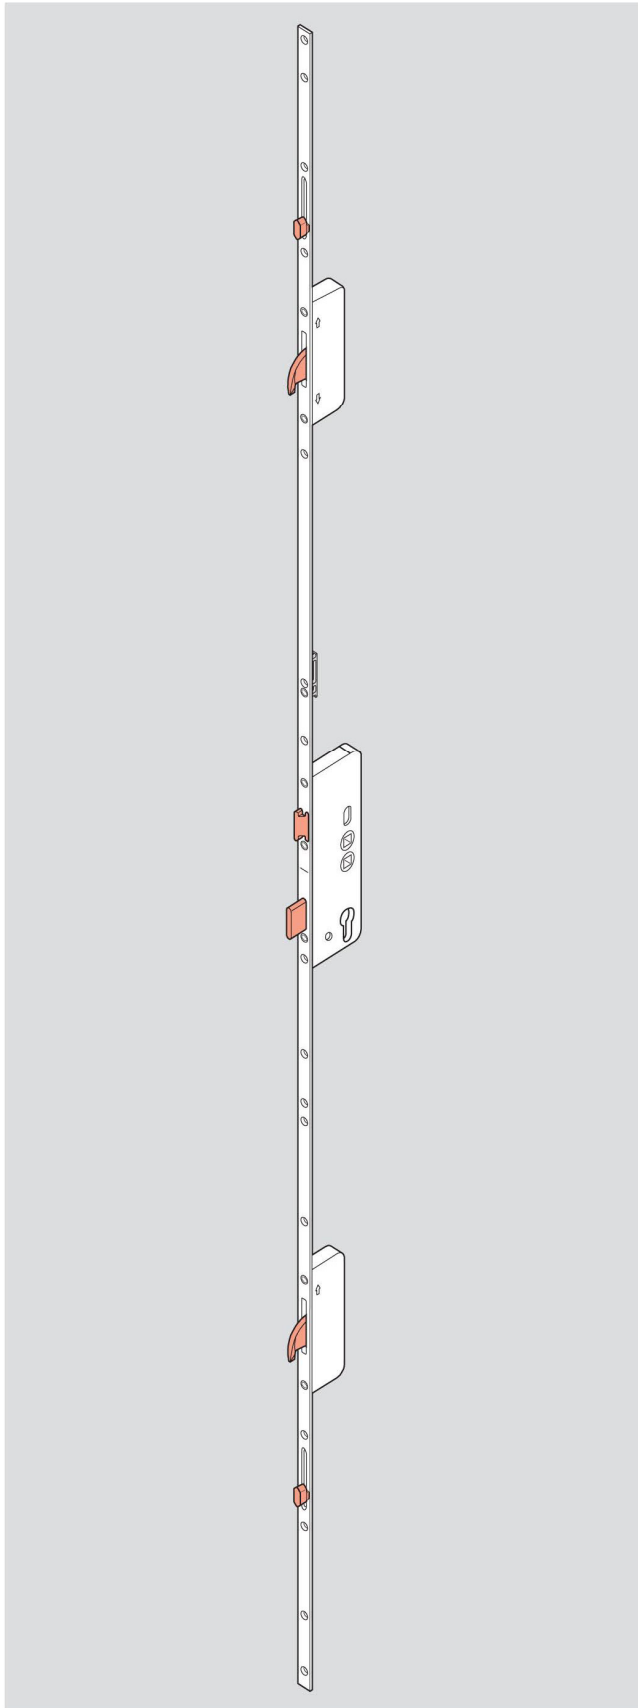

This one piece door lock consists of the main lock, two hooks top and bottom and two compression cams. The centre lock can be operated via a lever / moveable pad or a lever / lever handle. The advantage of using the lever moveable pad is that it utilises a second spindle allowing normal internal operation but preventing external operation except by the profile cylinder key. Once locked the external pad returns to the horizontal position.

The hooks top and bottom provide increased security whilst the compression cams allow ease of operation. As well as the features already mentioned the additional connection of either corner drives or shootbolts top and bottom is accommodated through 'teeth' at either end of the drive train.

Additional information

- Minimum sash rebate height 1675 mm / Maximum sash rebate height 2075 mm
- Minimum handle height 830 mm / Maximum handle height 1030 mm
- MLA (Master Locksmiths Association) approved
- 16 mm faceplate width
- 2 mm faceplate thickness
- 20 mm travel in the drive train
- Maximum fastener diameter 4.3 mm
- All visible surfaces are protective coated with a unique ROTOnor finish
- Surface protection with ROTOnor exceeds the requirements of the following:

BS 7479

BS EN 12329: 2000

Backset (mm)	Application range (mm)	Faceplate length (mm)	Part Number
35	1675 - 2075	2050	262 560